

Material	Thermally broken aluminium system
Mechanism	The door leaf is hung on the 3D adjustable door hinges and locked by multipoint lock
Security (optional)	Fully tested to Secure by design standards PAS 24:2012
Weatherseal	The door is fully weather sealed and tested to EN standards
Glass	The door is dry glazed with EPDM and can take dual or triple sealed units up to 52mm thickness
Thermal Performance	Uf-value up to 1.7 W/m ² K, depending on the frame/vent combination
Fittings	Door lever or pull handles, as well as options for concealed hinges, emergency fittings and easy access solutions.
Factory Finishing	Polyester powder coated available in single or dual colour

PRODUCT TYPE
SCHÜCO HIGH INSULATION ADS 70.HI ALUMINIUM DOOR

TITLE
ELEVATION DRAWING

DRAWING No.
S-A-ADS70/01

DATE
2018/06/06

SCALE

CONSTRUCTION DETAILS

FENSTER UAB
 Kirtimų 47, LT-02244,
 Vilnius, Lithuania
 Phone.: + 370 5 206 0987
 Mob.: +370 682 01711
 Fax.: +370 5 206 0986
 E-mail: info@zylefenster.com
 www.zylefenster.com








PRODUCT TYPE
**SCHÜCO HIGH
 INSULATION ADS 70.HI
 ALUMINIUM DOOR**

TITLE
TYPICAL SECTIONS

DRAWING No.
S-A-ADS70/02

DATE	SCALE
2018/06/06	1:2 @ A3

CONSTRUCTION DETAILS

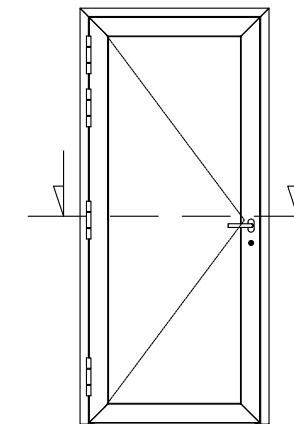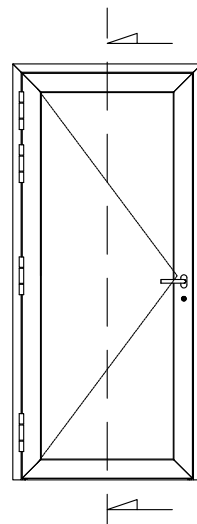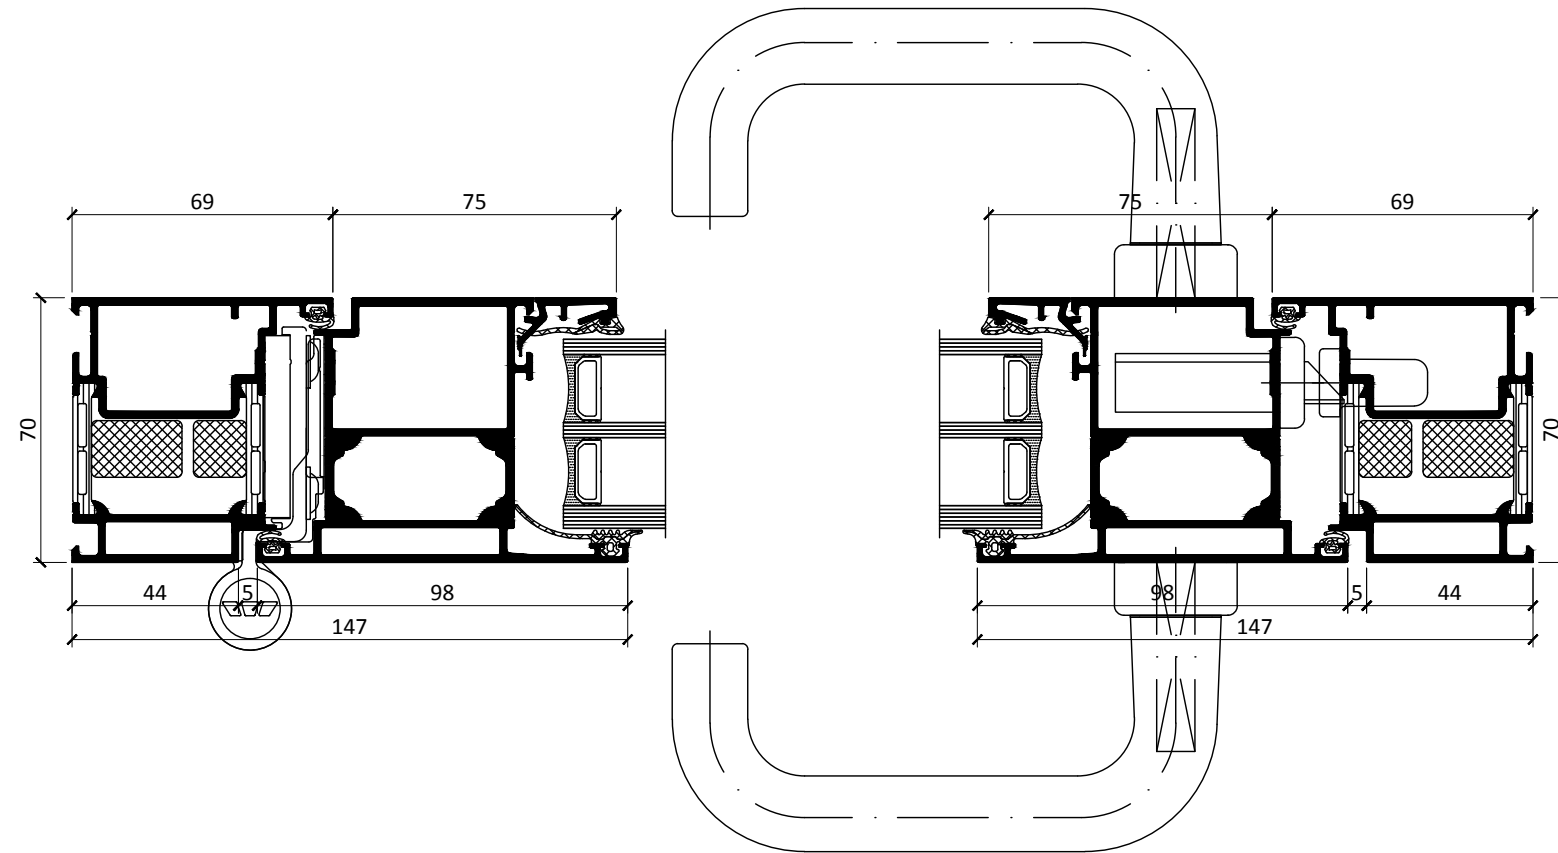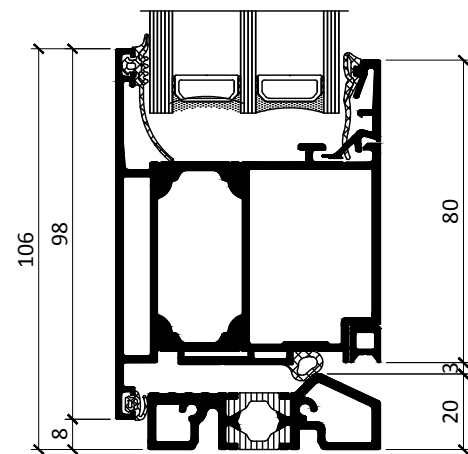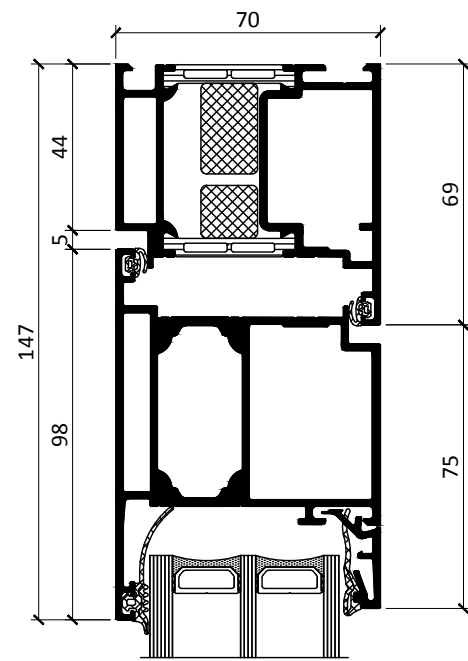

FENSTER UAB
 Kirtimų 47, LT-02244,
 Vilnius, Lithuania
 Phone.: + 370 5 206 0987
 Mob.: +370 682 01711
 Fax.: +370 5 206 0986
 E-mail: info@zylefenster.com
 www.zylefenster.com

